




# DSL-240 SERIES



## 3-FUNCTION REAR LED

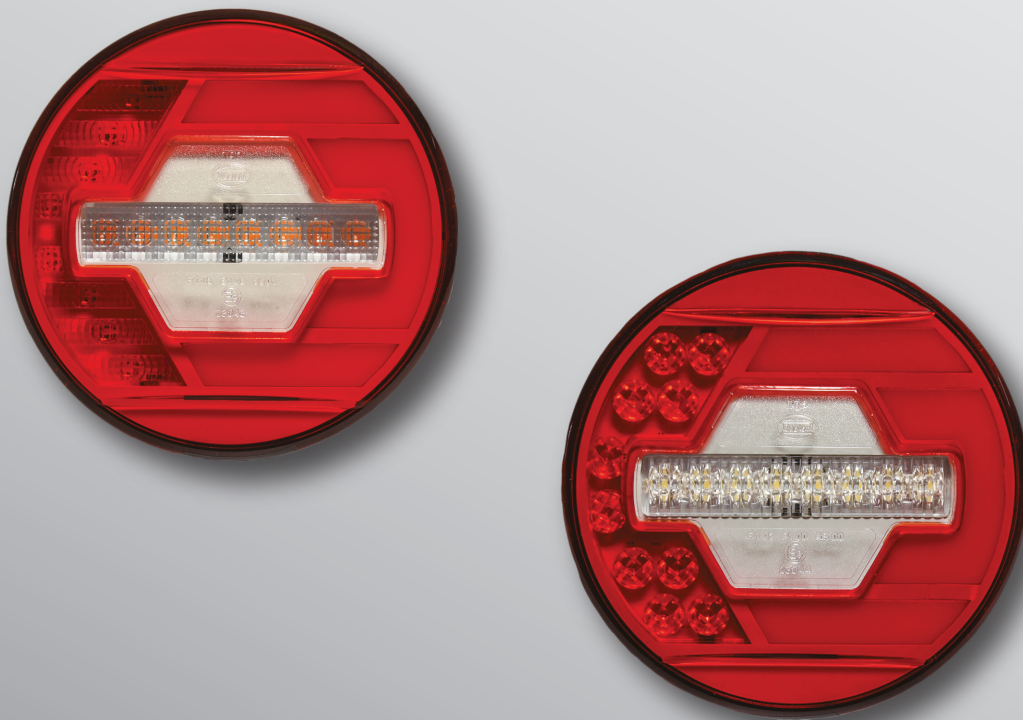

### PRODUCT BENEFITS


- Attractive EU design with Dynamic Direction Indicator
- IP67 Protection
- Impact resistant lens made of Polycarbonate
- Multi-voltage 10-30V
- Tail light which stands out due to Glowing Body Technology

## FUNCTIONS LAYOUT

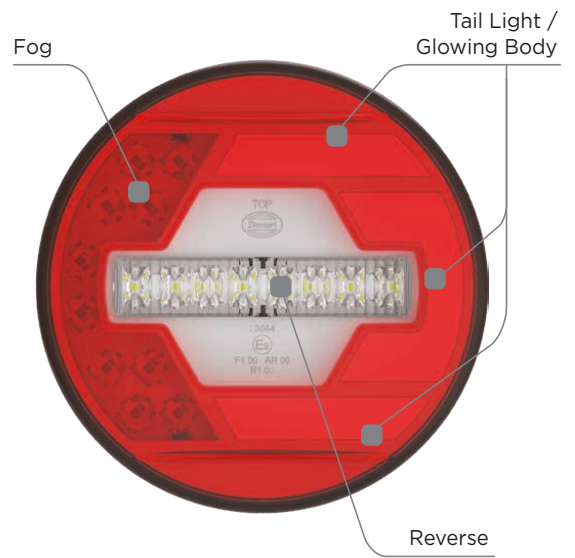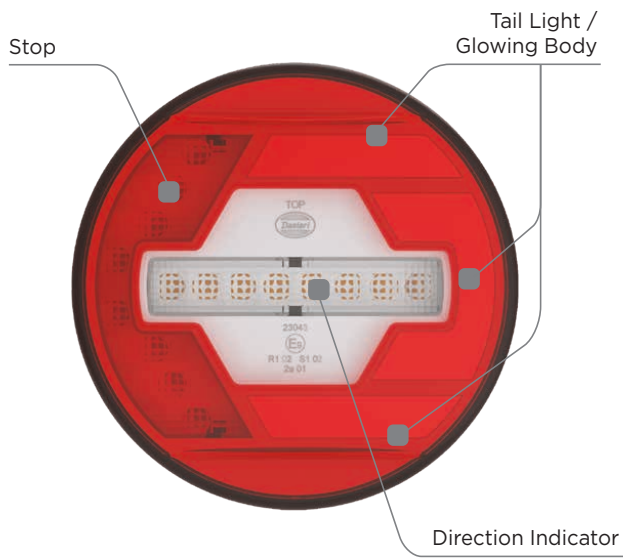


## BLACK VERSION AVAILABILITY

DSL-240BSTD-R

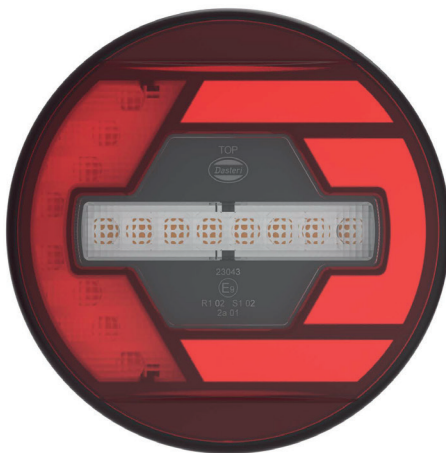

DSL-240BFRT-R

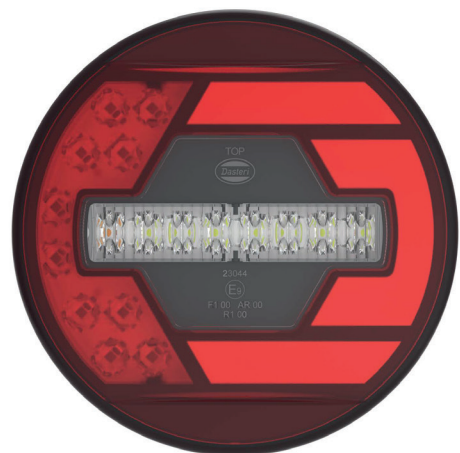

# TECHNICAL SPECIFICATIONS

## TECHNICAL DATA

Products Number		DSL-240STD			DSL-240FRT		
Operating Voltage		10 V - 30 V					
Reverse Polarity Protection		Yes					
Temperature Range		- 40C / + 65C					
Type of Mounting		Screw Mounting					
Material	Lens	PMMA					
	Housing	ABS / PC					
Type of Protection		IP67					
Light Function		Rear Position	Stop	Direction Indicator	Rear Position	Fog	Reverse
Emitted Color		Red	Red	Amber	Red	Red	White
Consumption		1,7W	3W	3,8W	1,7W	4,3W	2W
Approvals	ECE	R7 R1	R7 S1	R6 2a	R7 R1	R38 F1	R23 AR
	EMC	R10-06					
Type of Connection		500mm Cable					

## CODES OVERVIEW

Variants Ref. No.	Rear Position	Stop	Dynamic Dir. Indicator	Fog	Reverse	Left	Right	Grey Bezel	Black Bezel
DSL-240STD-L	•	•	•			•		•	
DSL-240STD-R	•	•	•				•	•	
DSL-240FRT-L	•			•	•	•		•	
DSL-240FRT-R	•			•	•		•	•	
DSL-240BSTD-L	•	•	•			•			•
DSL-240BSTD-R	•	•	•				•		•
DSL-240BFRT-L	•			•	•	•			•
DSL-240BFRT-R	•			•	•		•		•

## DIMENSIONAL DRAWING

